

ATV MINI TRAILER

EASY2



MANUAL


ART-NR. 9051402




PARTS IDENTIFICATION


Parts list

- 1) Front Panel (1)
- 2) Side Panel (2)
- 3) Back Panel-Tailgate (1)
- 4) Bottom Panel (2)
- 5) Netted Front Panel (1)
- 6) Netted Side Panel (2)
- 7) Netted Back Panel (1)
- 8) Hitch Tongue (1)
- 9) Wheel Axle Support (2)
- 10) Wheel Axle Bar (1)
- 11) Lock Handle (8)
- 12) Rear Cross Brace (1)
- 13) Tongue Support (1)
- 14) Tires (2)
- 15) Hitch Coupler
- 16) Tongue Latch (1)

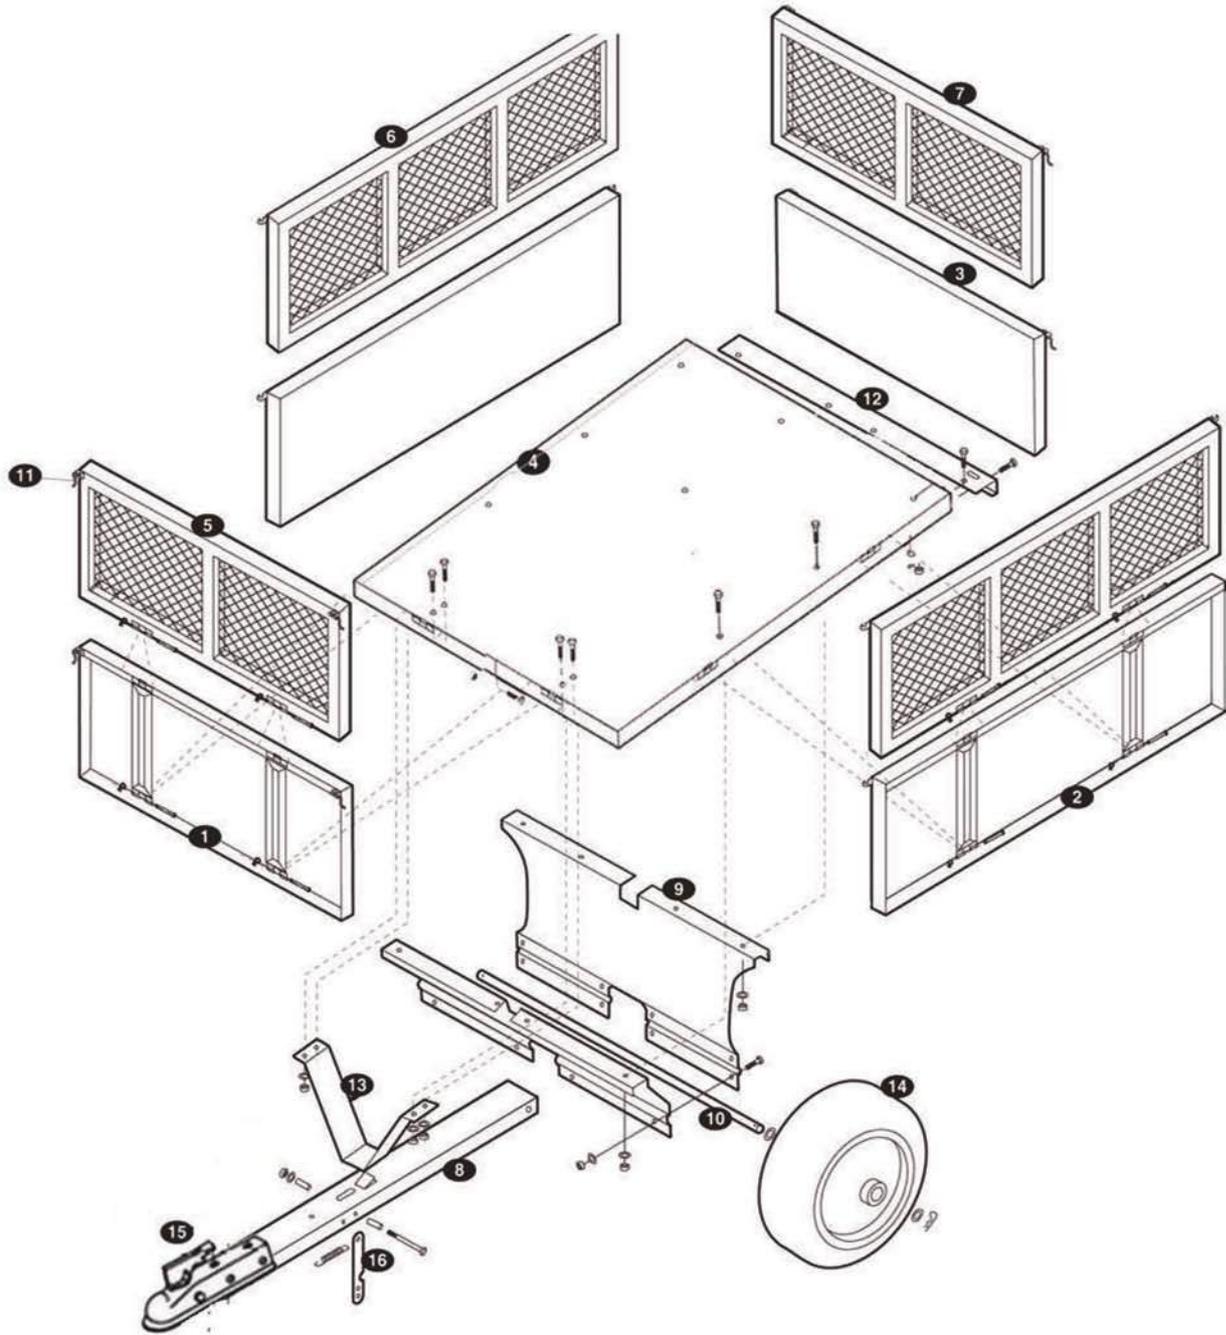


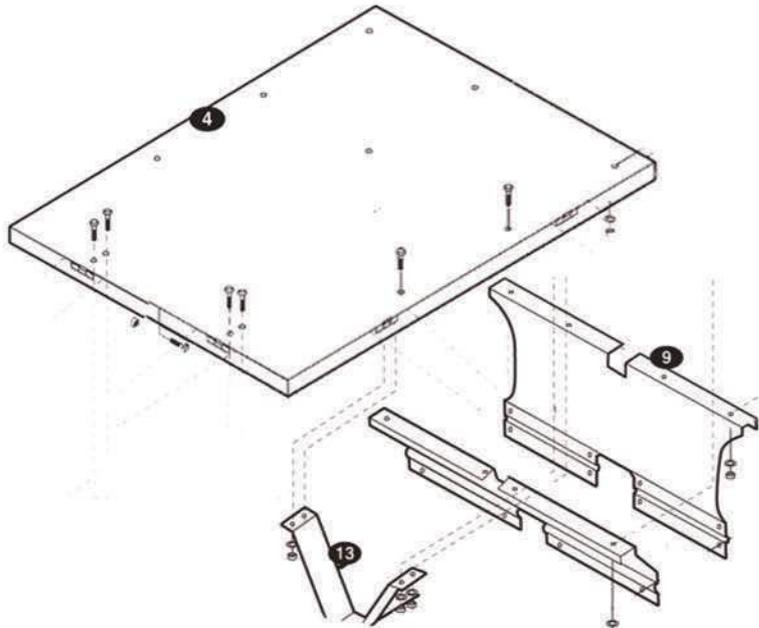


1. Attach wheel axle support (9) .tongue support (13) and the bottom panel (4) together using provided bolts and nuts and washers.

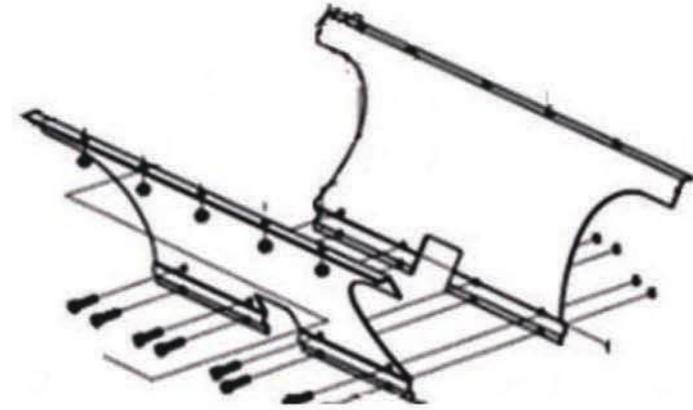


2. Attach two axle support with bolts and nuts

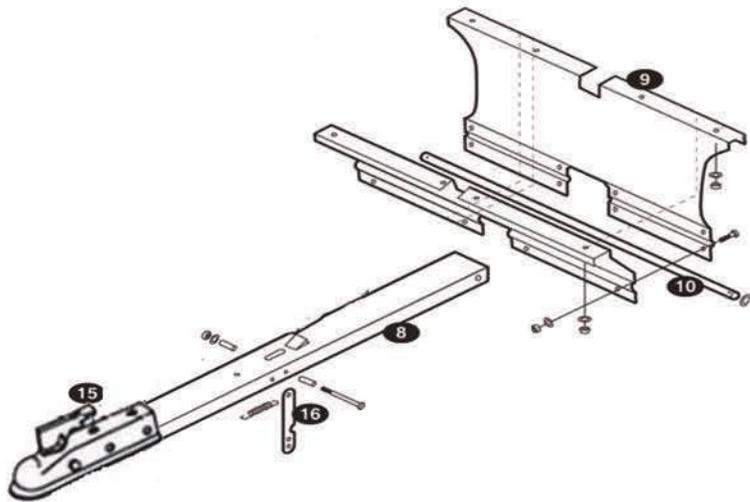


3. Put the hitch tongue (8) in the middle of the axle support. Then pass the wheel axle bar (10) through the hitch tongue and axle support.

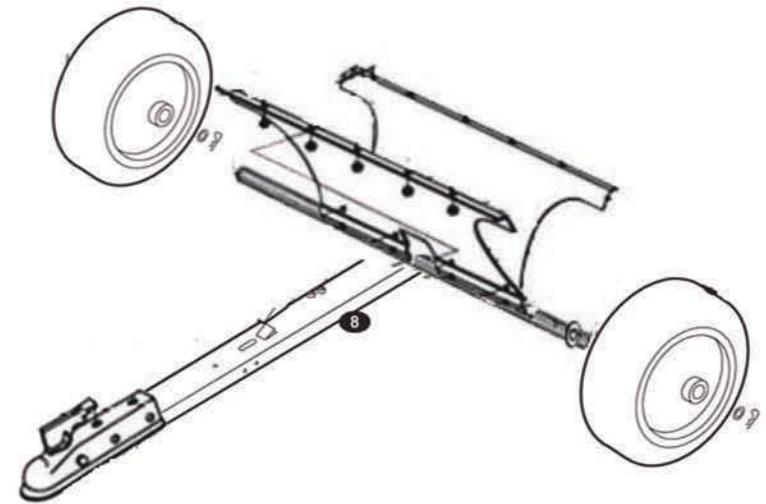

4. Mount the tires (14) and the washers on both sides , Insert the pin.

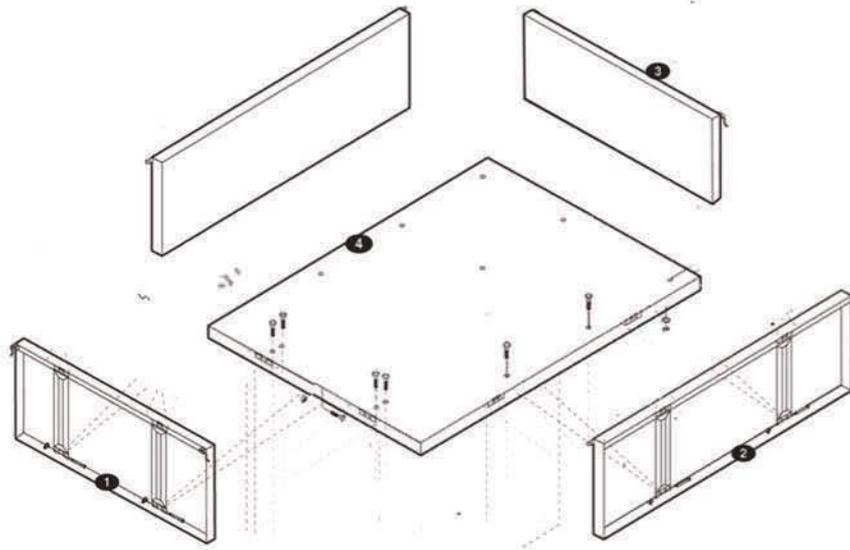

5. Attached front panel (1).side panel (2).back panel (3) and bottom panel (4) together.

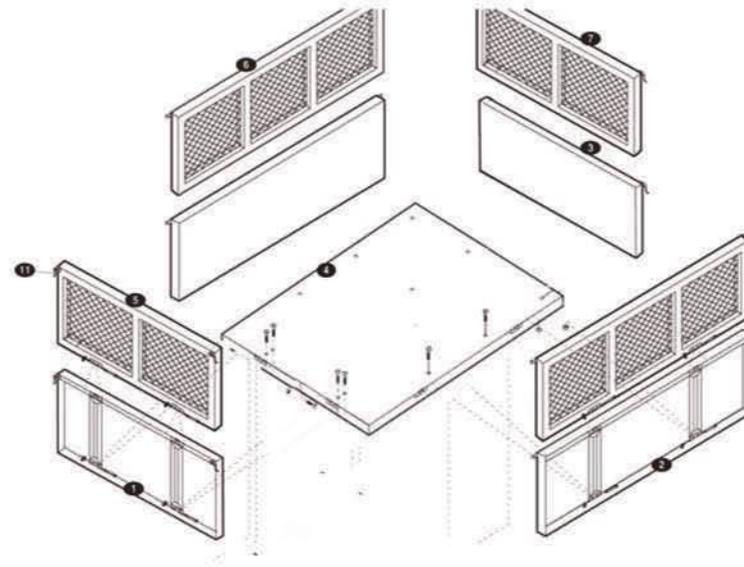

6. Attached four netted panels (5.6.7) and four steel panels together.



7.Finished.

USING YOUR DUMP CART

To Dump: Pull latch toward mower, and cart body will tilt back to dump position.

To Return To Pulling Position: Push down on the front of the cart body until latch engages and pedestal secures to the tow bar.

Tractor speed should be governed by weight of load. The heavier the load, the slower the speed for safe operation.

MAINTENANCE INSTRUCTIONS

Check tire pressure at regular intervals. Proper inflation will prolong life of tires.

NOTE: 750 lbs. maximum capacity

Approximate weight 1 Cu. Ft.

Body size:L1520xW875xH1090mm

Wheel:16x400- 8

Max Speed: 4 MPH

WARNING DANGER OF IMPROPER USE OF TRAILER CART

This unit is intended for use only with riding mowers or tractors. It is definitely not for highway use, being pulled at high speeds, or transporting passengers of any sort. Such use could result in injuries for which we cannot be held responsible.